


## 100G-BASE-LR4 10km CFP2 Optical Transceiver

### GTR4C24L-S

#### Features

- Hot Pluggable CFP2 MSA package
- IEEE 802.3ba 100GBASE-LR4 compliant
- CFP-MSA-CFP2-HW-Specification compliant
- Up to 10km for G.652 SMF
- Receiver: 4 x 25Gb/s PIN ROSA
- Transmitter: 4 x 25Gb/s WDM TOSA  
(1295.56,1300.05,1304.58,1309.14nm)
- 4 x 25G Electrical Serial Interface (CEI-28G-VSR)
- MDIO management interface with Digital Diagnostic
- +3.3V power supply
- Power consumption less than 9W
- Compact size: 107.5 x 41.5 x 12.4 mm
- Operating case temperature: 0 to +70 °C
- Duplex LC Receptacle
- ROHs-6 compliant

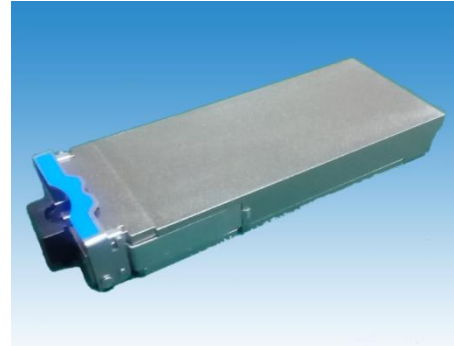

#### Applications

- 100GE Routers and Switches
- 100G Network Security  
And Monitoring

#### Description

GWorld Opto's GTR4C24L-S CFP2 transceivers are designed for use in 100 Gigabit Ethernet links over 10km single module fiber, and it compliant to the CFP MSA CFP2 HW Specification and IEEE 802.3ba 100GBASE-LR4. Digital diagnostics are available via MDIO as specified in the CFP MSA Management Interface Specification.

The transceiver's designs are optimized for high performance and cost efficiency to provide customers the best solutions for Datacom and Telecom applications.

The transceiver is RoHS-6 compliant and lead-free per Directive 2002/95/EC.

#### Product Selection

### GTR4C24L-S

G: GWorld  
 TR: Transceiver  
 4: 100Gb/s  
 C24: CFP2 Solution 4  
 L: LR4 10km  
 S: Single Rate